





# Arch Facts

By  
*American Arches*

## Stock Arch Slat Installation

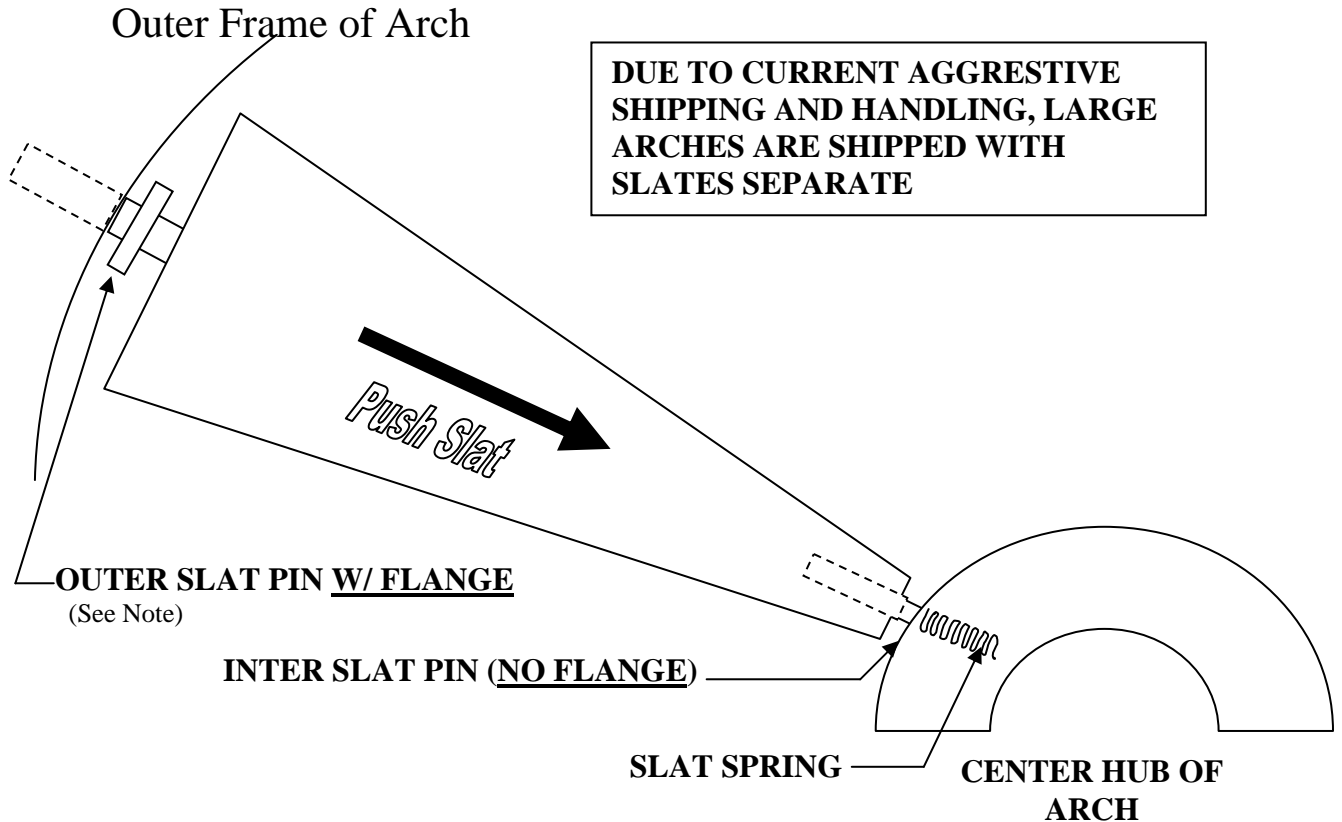

1. Insert slat spring into center hub of arch
2. Insert inter slat pin (no/flange) into small end of slat
3. Insert outer slat pin (w/flange) into large end of slat
4. Insert arch slat into lower pin hole and press down slat against lower spring allowing outer slat pin to go into predrilled outer pin hole



**Note: Newer outer slat pins with lock maybe used to replace outer slat pins with flange**

American Arches  
11269 Windfern Suite B  
Houston, Texas 77064  
Tel: 281 955-6779 Fax: 281 955 7339  
National 800 Numbers- Tel: 1-888-994-2769 Fax: 1-800-683-9635  
Visit us on Line @ [www.Americanarches.com](http://www.Americanarches.com)